

Sanitary Nanofiltration Spiral-Wound Element: **NFX (150-300Da)**

Synder Filtration's Nanofiltration membranes are engineered and designed to provide superior separation performance for various application needs. Known for its stable flux and wide range of rejection to monovalent and divalent ions, Synder's NF membranes have been developed specifically for specialty process applications.



MEMBRANE SPECS

| Model | Polymer | Approx. Molecular Weight Cutoff | Typical Operating Flux | Min Lactose Rejection ¹ | Min MgSO ₄ Rejection ² | Average NaCl Rejection ³ |
|-------|--------------------|---------------------------------|------------------------|------------------------------------|--|-------------------------------------|
| NFX | Proprietary PA TFC | 150-300Da | 20-25 GFD | 99.0% | 99.0% | 40.0% |

¹Test Conditions: 2,000ppm Lactose solution at 110psi (760kPa) operating pressure, 77°F (25°C)

²Test Conditions: 2,000ppm MgSO₄ solution at 110psi (760kPa) operating pressure, 77°F (25°C)

³Test Conditions: 2,000ppm NaCl solution at 110psi (760kPa) operating pressure, 77°F (25°C)

COMMON APPLICATIONS

- Demineralization & concentration of lactose
- Dye & optical brightening agent concentration
- Seawater sulfate removal

RECOMMENDED OPERATING PARAMETERS

| Operating Parameters | |
|--------------------------------|--|
| Maximum Operating Pressure | 600psi (4,137kPa) if T <95°F (35°C) 435psi (3,000kPa) if T >95°F (35°C) |
| Maximum Temperature | 50°C (122°F) |
| pH Range @ Max Temperature | 3-9.5 |
| pH Range @ Ambient Temperature | 3-10.5 |

| Cleaning Parameters | |
|---|--------------|
| Maximum Temperature (Short term <30min) | 50°C (122°F) |
| pH Range @ Max Temperature | 2-11 |
| pH Range @ Ambient Temperature | 2-11 |

| Pressure Drop | PSI |
|---------------------|----------------|
| Maximum per Element | 15psi (103kPa) |
| Maximum per Housing | 60psi (414kPa) |

| Chlorine Tolerance |
|--|
| 500ppm hours, dechlorination recommended |

NF SERIES BENEFITS

- Competitive flux as the current industry standard NF membranes
- Excellent MgSO₄ and lactose rejection
- Operate at lower pressures than Reverse Osmosis membranes and still achieve excellent rejection of divalent and multivalent ions
- NF membranes greatly reduce levels of hardness, nitrates, sulfates, tannins, turbidity, color, TDS, and moderate levels of salt from feed water streams

CONTACT US




4941 Allison Parkway
Vacaville, CA 95688, USA
Phone: 1 (707) 451-6060
Fax: 1 (707) 451-6064
Email:
sales@synderfiltration.com

All inquiries will be responded to by a Synder employee personally within 24 hours.



ELEMENT DIMENSIONS & WEIGHT

| Element | Model Number | Diameter (B) in (cm) | Length (A) in (cm) | PWT ID/OD in (cm) | Tube Extension (C) in (cm) | Dry Weight lb (kg) |
|---------|--------------|-------------------------|-----------------------|----------------------|-------------------------------|-----------------------|
| 1.8" | 1812F | 1.8 (4.6) | 12.0 (30.5) | 0.63 (1.6) | - | 1.0 (0.5) |
| 2.5" | 2540F | 2.4 (6.1) | 40.0 (101.6) | 0.63 (1.6) | - | 4.0 (1.8) |
| | 2540M | 2.4 (6.1) | 40.0 (101.6) | - | 1 (2.54) (Both Ends) | 4.0 (1.8) |
| 3.8" | 3838 | 3.8 (9.7) | 38.0 (96.5) | 0.83 (2.1) | - | 9.0 (4.1) |
| | 3838.75 | 3.8 (9.7) | 38.8 (98.4) | 0.81 (2.1) | - | 9.0 (4.1) |
| 8" | 8038 | 7.9 (20.1) | 38.0 (96.5) | 1.13 (2.9) | - | 29.0 (13.2) |
| | 8040 | 7.9 (20.1) | 40.0 (101.6) | 1.13 (2.9) | - | 29.0 (13.2) |

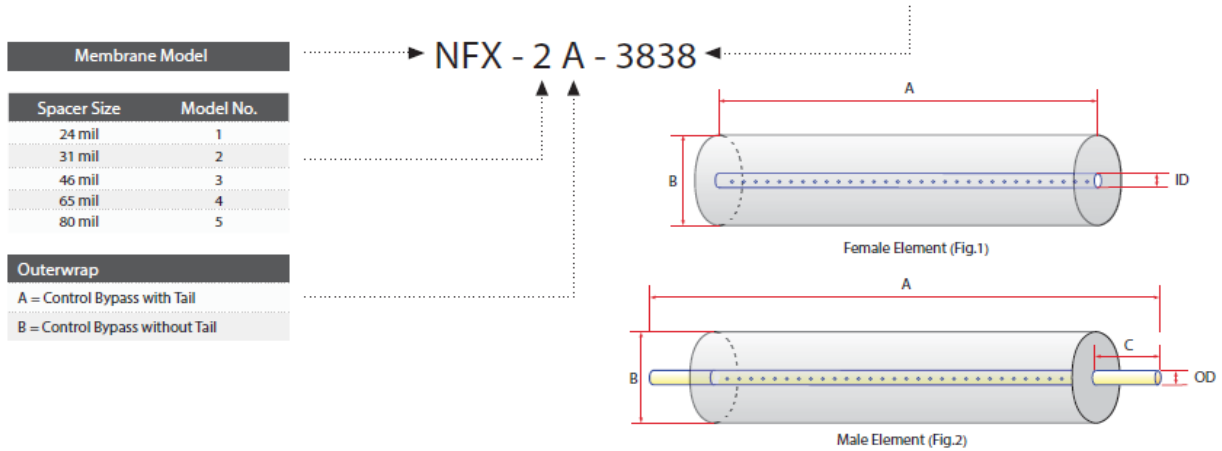

RECOMMENDED ELEMENT CROSS FLOW RATE

| Element | | Feed Spacer (in mils) | | | | |
|---------|--------------------|-----------------------|-----|-----|-----|-----|
| | | 24 | 31 | 46 | 65 | 80 |
| 1.8" | m ³ /hr | 0.7 | 0.7 | 0.7 | 0.9 | 0.9 |
| | gpm | 3 | 3 | 3 | 4 | 4 |
| 2.5" | m ³ /hr | 1.4 | 1.4 | 1.6 | 1.6 | 1.8 |
| | gpm | 6 | 6 | 7 | 7 | 8 |
| 3.8" | m ³ /hr | 6 | 7 | 8 | 8 | 9 |
| | gpm | 26 | 29 | 33 | 36 | 38 |
| 8" | m ³ /hr | 16 | 18 | 21 | 23 | 24 |
| | gpm | 68 | 76 | 89 | 98 | 103 |

The recommended cross flow rate will be subject to differential pressure limitations and specific applications.

NF MEMBRANE AREA (SQ. FT.)

| Element | Feed Spacer (in mils) | | | | |
|---------|-----------------------|-----|-----|-----|-----|
| | 24 | 31 | 46 | 65 | 80 |
| 1812F | 6 | 5 | 4 | 3 | 3 |
| 1812M | 5 | 4 | 3 | 3 | 2 |
| 2540F | 44 | 38 | 30 | 24 | 20 |
| 2540M | 42 | 36 | 28 | 23 | 19 |
| 3838 | 110 | 96 | 75 | 59 | 50 |
| 3838.75 | 112 | 98 | 77 | 60 | 51 |
| 8038 | 495 | 432 | 336 | 265 | 227 |
| 8040 | 522 | 456 | 355 | 280 | 239 |

TECHNICAL NOTES

For element sizes not listed, please call or email Synder Filtration for details. We can design an element to fit your exact needs – just specify the element outer diameter (OD) or vessel/housing inner diameter (ID), element inner diameter (ID), and length. Elements are also available with or without a controlled bypass tail. Additional feed spacers are also available.

Trials should be conducted to determine optimal application conditions.