


NFS (TFC 200-300Da)

Sanitary NF Membrane

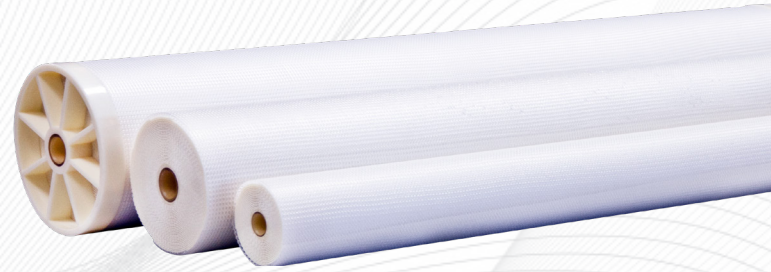

| Model | Polymer | Approx. Molecular Weight Cutoff | Typical Operating Flux | Average Lactose Rejection ¹ | Average MgSO ₄ Rejection ² | Average NaCl Rejection ³ |
|-------|--------------------|---------------------------------|------------------------|--|--|-------------------------------------|
| NFS | Proprietary PA TFC | 200-300Da | 30-40 GFD | 99.5% | 99.5% | 50.0% |

¹Test Conditions 2% Lactose Solution at 110PSI (7.6 Bar) operating pressure, 77° F (25° C)
²Test Conditions 2,000ppm MgSO₄ Solution at 110PSI (7.6 Bar) operating pressure, 77° F (25° C)
³Test Conditions 2,000ppm NaCl Solution at 110PSI (7.6 Bar) operating pressure, 77° F (25° C)

SANITARY ELEMENT OPERATING SPECIFICATIONS

| Pressure | PSI | Bar |
|--|-----|------|
| Max. Operating Pressure if T<95°F (35°C) | 600 | 41.4 |
| Max. Operating Pressure if T>95°F (35°C) | 435 | 30.0 |
| Max. Pressure Drop per Element | 15 | 1.0 |
| Max. Pressure Drop per Housing | 60 | 4.1 |

| Temperature | Fahrenheit | Celsius |
|---------------------------|------------|---------|
| Max. Continuous Operation | 122° | 50° |
| Max. CIP Temperature | 104° | 40° |

| pH Parameters | pH |
|----------------------|---|
| Operating Parameters | At Max Temp. - 3-9.5 At Ambient Temp. - 3-10.5 |
| Cleaning Parameters | At Max Temp. - 2-11 At Ambient Temp. - 2-11 |

Chlorine

Dechlorination recommended

NOTE: Trials should be made to determine temperature and viscosity effects. Ribbed spacers are also available for high solids applications.

DAIRY PRODUCTS TOTAL SOLIDS LIMITS

| Dairy Product Total Solids Limits | Spacer | | | |
|-----------------------------------|--------|----|----|----|
| | 31 | 46 | 65 | 80 |
| Sweet Whey Max. T.S. | 15 | 25 | 28 | 30 |
| Acid Whey Max. T.S. | 15 | 24 | 26 | 28 |
| Skim Milk Max. T.S. | 14 | 24 | 26 | 28 |
| Whole Milk Max. T.S. | 15 | 30 | 33 | 35 |

RECOMMENDED ELEMENT CROSS FLOW RATE

| Element | | Feed Spacer (in mils) | | | | |
|---------|--------------------|-----------------------|-----|-----|-----|-----|
| | | 24 | 31 | 46 | 65 | 80 |
| 1.8" | m ³ /hr | 0.7 | 0.7 | 0.7 | 0.9 | 0.9 |
| | gpm | 3 | 3 | 3 | 4 | 4 |
| 2.5" | m ³ /hr | 1.4 | 1.4 | 1.6 | 1.6 | 1.8 |
| | gpm | 6 | 6 | 7 | 7 | 8 |
| 3.8" | m ³ /hr | 6 | 7 | 8 | 8 | 9 |
| | gpm | 26 | 29 | 33 | 36 | 38 |
| 8" | m ³ /hr | 16 | 18 | 21 | 23 | 24 |
| | gpm | 68 | 76 | 89 | 98 | 103 |

The recommended cross flow rate will be subject to differential pressure limitations and specific applications.


NF MEMBRANE AREA (SQ FT)

| Element | Feed Spacer (in mils) | | | | |
|---------|-----------------------|-----|-----|-----|-----|
| | 24 | 31 | 46 | 65 | 80 |
| 1812F | 4.7 | 4.0 | 3.0 | 2.0 | 1.9 |
| 2540F | 38 | 30 | 22 | 19 | 15 |
| 2540M | 36 | 28 | 20 | 18 | 14 |
| 3838 | 100 | 87 | 68 | 52 | 43 |
| 3838.75 | 104 | 89 | 69 | 53 | 44 |
| 8038 | 450 | 400 | 300 | 240 | 200 |
| 8040 | 450 | 400 | 300 | 240 | 200 |



DIMENSIONS & WEIGHT

| Element | Model Number | Diameter (B) in (cm) | Length (A) in (cm) | PWT ID/OD in (cm) | Tube Extension (C) in (cm) | Dry Weight lb (kg) |
|---------|--------------|-------------------------|-----------------------|----------------------|-------------------------------|-----------------------|
| 1.8" | 1812F | 1.8 (4.6) | 12 (30.5) | 0.625 (1.59) | - | 1.0 (0.5) |
| 2.5" | 2540F | 2.4 (6.1) | 40.0 (101.6) | 0.625 (1.59) | - | 4.0 (1.8) |
| | 2540M | 2.4 (6.1) | 40.0 (101.6) | - | 1 (2.54) (Both Ends) | 4.0 (1.8) |
| 3.8" | 3838 | 3.8 (9.65) | 38.0 (96.52) | 0.831 (2.11) | - | 9.0 (4.1) |
| | 3838.75 | 3.8 (9.65) | 38.75 (98.43) | 0.831 (2.11) | - | 9.0 (4.1) |
| 8" | 8038 | 7.9 (20.06) | 38.0 (96.52) | 1.125 (2.86) | - | 29 (13.2) |
| | 8040 | 7.9 (20.06) | 40.0 (101.6) | 1.125 (2.86) | - | 29 (13.2) |

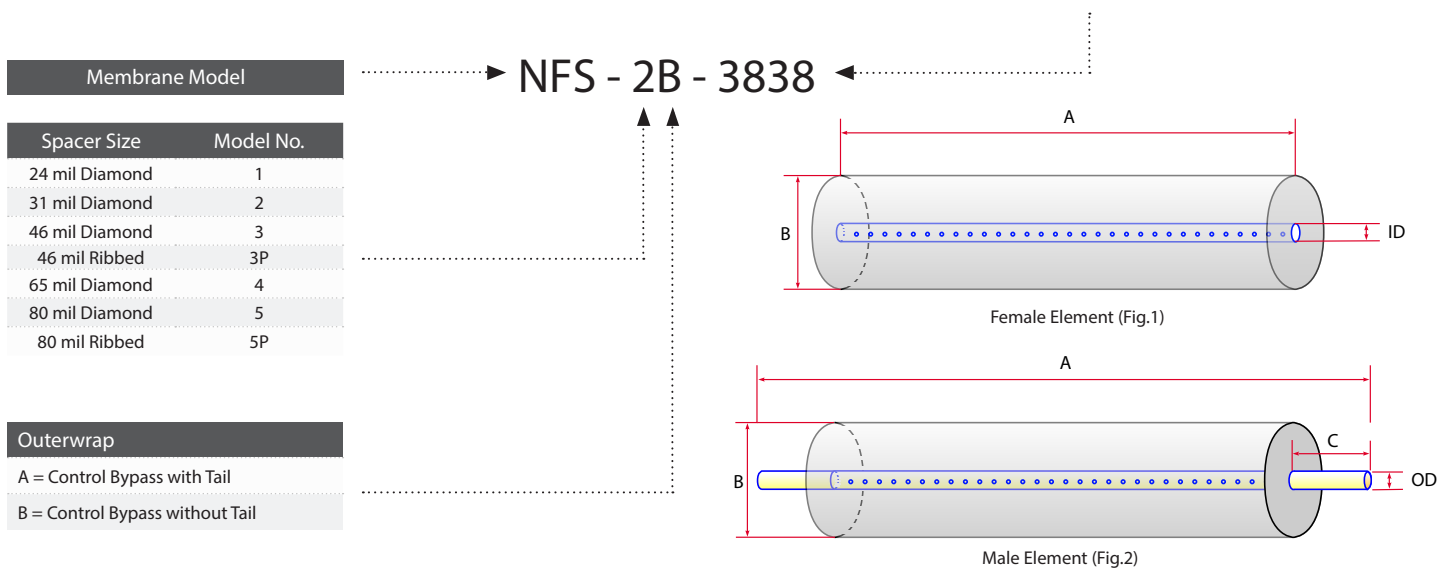

TECHNICAL NOTES

For element sizes not listed, please call or email Synder Filtration for details. We can design an element to fit your exact needs - just specify the element outer diameter (OD) or vessel/housing inner diameter (ID), element inner diameter (ID), and length. Elements are available with or without a controlled bypass tail. Additional feed spacers are also available.

Trials should be conducted to determine optimal application conditions.

Refer to installation, cleaning, and storage procedures for more details.



CONTACT US

4941 Allison Parkway
 Vacaville, CA 95688
 Phone: +1-707-451-6060
 Fax: +1-707-451-6064
 Email: sales@synderfiltration.com | support@synderfiltration.com
www.synderfiltration.com

All inquiries will be responded to by a Synder employee personally within 24 hours.